


article number: 770963

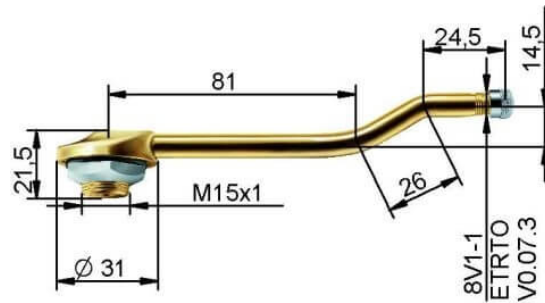

description	130MSF20,5 \"For wheels with special flat base rims in conjunction with PILOTE \"X\" tubeless tyres\"
Anwendungsgebiet	Commercial vehicles
Art.No.	770963
ETRTO no.	V3.18.2
Michelin no.	920
tdt_ventilloch	20,5 + 0,5
Pressure range	< 14 bar
tdt_felgenstaerke	felgenstaerke=3,5 - 6,0 felgenstaerke=3,5 - 6,0
tdt_installationtorque_nm	25 - 31
Typ	MSF valve
tdt_ventilloch_durchmesser_mm	20,5 + 0,5
tdt_felgendicke_mm	3,5 - 6,0
tdt_anzugsmoment_nm	25 - 31
A (mm)	81
B (mm)	26
A (°)	146
C (mm)	24,5
B (°)	146
tdt_druckbereich_bar	< 14 bar
PU	10