


## article number: 770973

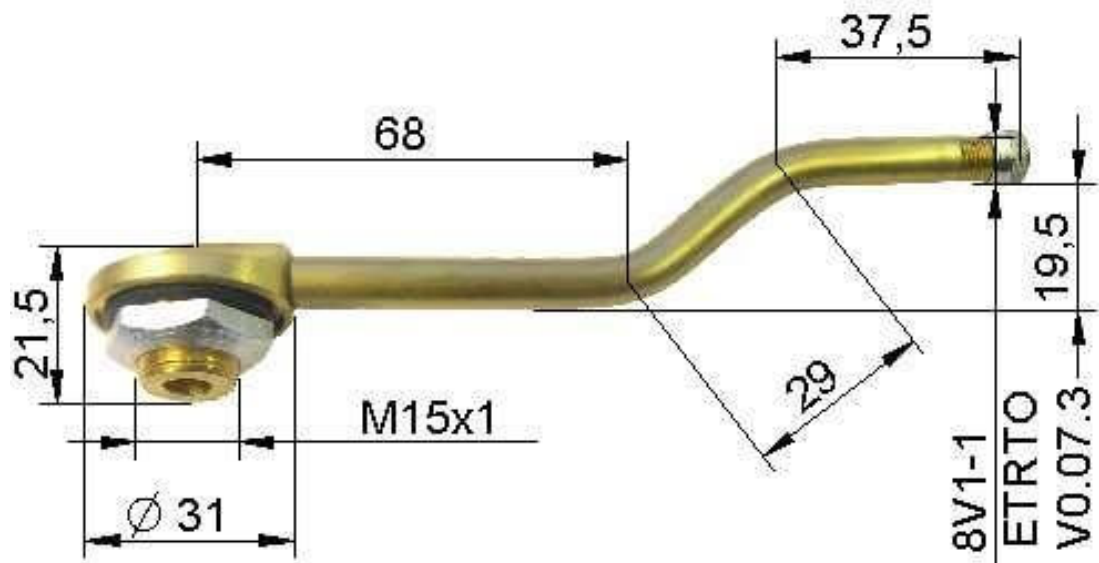

description	135MSF20,5 "For wheels with special flat base rims in conjunction with PILOTE "X" tubeless tyres"
Anwendungsgebiet	Commercial vehicles
Art.No.	770973
ETRTO no.	V3.18.5
Michelin no.	1117
tdt_ventilloch	20,5 + 0,5
Pressure range	< 14 bar
tdt_felgenstaerke	felgenstaerke=3,5 - 6,0 felgenstaerke=3,5 - 6,0
tdt_installationtorque_nm	25 - 31
Typ	MSF valve
tdt_ventilloch_durchmesser_mm	20,5 + 0,5
tdt_felgendicke_mm	3,5 - 6,0
tdt_anzugsmoment_nm	25 - 31
A (mm)	68
B (mm)	29
A (°)	138
C (mm)	37,5
B (°)	138
tdt_druckbereich_bar	< 14 bar
PU	10